




IndigoVision

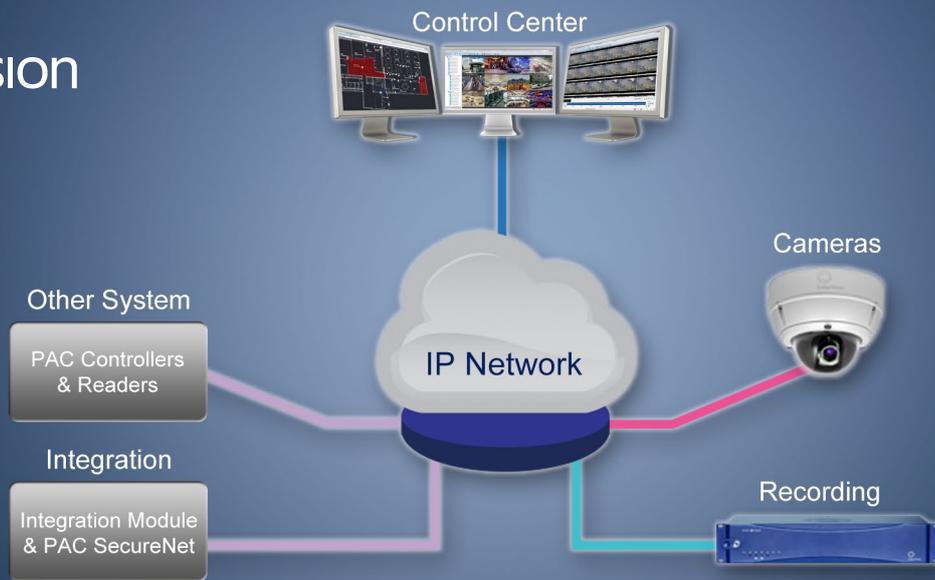

# PAC SecureNet

The IndigoVision PAC SecureNet Integration Module allows alarms and events from PAC systems to be seamlessly combined with IndigoVision’s video security solution, giving complete video and alarm management in a single user interface – Control Center.

Trigger live video, move PTZ cameras, start recordings, lock/unlock doors, acknowledge SecureNet alarms, arm/disarm areas and send notification emails automatically - helping to dramatically decrease operator response time.

## Key Features

CONTROL CENTER  
ACTING AS FRONT END



## Product Codes

Product Code	
PAC Integration Module, Software License Key*	317415

\* Supported from v2.0 of the Integration Module.

# Specifications

General Specifications	
PAC System Software Requirements	PAC SecureNet v4.6.287 and v4.6.333, with a PAC OEM Interface License
IndigoVision System Software Requirements	IndigoVision PAC Integration SecureNet Module v2.1. Compatible with SMS4™ r2/Control Center v11.0 or later
Event and Alarm Integration Capability	Unidirectional flow of events and alarms from the PAC system into Control Center.
Alarm Acknowledgement Capability	PAC SecureNet alarms can be cleared from within the Control Center interface.
Integration Server Specification	<p>PC requirements for PAC SecureNet vary depending on the size of the access control system and the database software being used. Refer to PAC documentation for advice on machine specifications.</p> <p>The IndigoVision PAC SecureNet Integration Module may run on the same PC as PAC SecureNet or on a separate PC. There are no extra requirements on the specification of the PC due to the IndigoVision software.</p> <p>NOTE: The Integration Module is a licensed product. A correctly licensed USB dongle or software license key must be present on the platform running the Integration Module. The Integration Module should not be run on the same server as the Windows NVR-AS 13.2 or earlier or certain Integration Modules.</p>
Manually Control Actions within the Third Party System	Control Center operators can create specific events in the PAC SecureNet system such as changing the access state of a door from locked to unlocked or arming an area.
Supported Products	SecureNet Advanced, SecureNet Professional, PAC 500 Series Controllers, PAC Oneprox Readers, PAC Biometric Readers, PAC Smart Readers, ID Devices
Supported Operating Systems	Microsoft® Windows Server 2016®, Microsoft® Windows Server 2012 R2®, Microsoft® Windows Server 2012®, Microsoft® Windows Server 2008 R2®, Microsoft® Windows 10® (64-bit), Microsoft® Windows 8.1® (64-bit), Microsoft® Windows 7® (64-bit)

## PAC Events and IndigoVision Actions Supported

Examples of Supported Events
Door/Access events
Fire alarm
Panic button
Intruder sensor
Temperature sensor
Timer events
Motion sensor

Examples of Supported Actions
PTZ Camera moves to Preset
Video from one or more cameras displayed on operator's PC
Notification email sent
Recording of camera started
CCTV site map pops up with event source highlighted
Two way audio connection established so operator can listen and talk to the source of the event
Relay triggered action initiated e.g. door opens or lights turn on