




IndigoVision

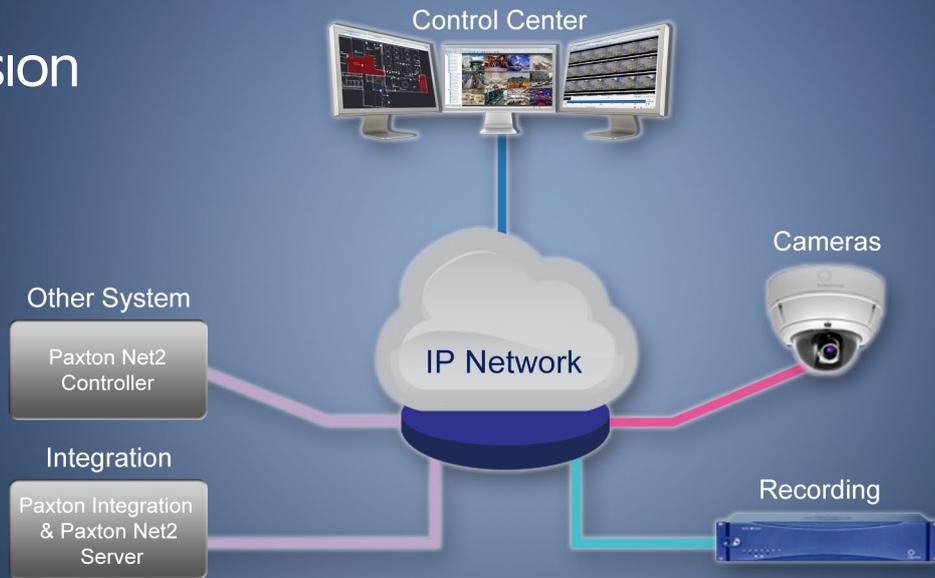

# Paxton

The IndigoVision Paxton Integration allows alarms and events from Paxton Net2 systems to be seamlessly combined with IndigoVision's video security solution, giving complete video and alarm management in a single user interface – Control Center.

Trigger live video, move PTZ cameras, start recordings and send notification emails automatically - helping to dramatically decrease operator response time.

Using IndigoVision's Control Center Software, actions in the Paxton system can also be executed; e.g. locking/unlocking doors, acknowledging Paxton events, silencing controllers, etc.

## Key Features

CONTROL CENTER  
ACTING AS FRONT END



## Product Codes

Product Code	
Paxton Integration, Software License Key*	317419

\*Supported from v2.0 of the Integration onward



# Specifications

General Specifications	
Paxton System Software Requirements	Paxton Net2 Lite or Net2 Pro v6.00
IndigoVision System Software Requirements	IndigoVision Paxton Integration v2.1. Compatible with SMS4™ r2/Control Center v11.0 or later
Event and Alarm Integration Capability	Unidirectional flow of events and alarms from the Paxton Net2 system into Control Center.
Alarm Acknowledgement Capability	Unidirectional management of acknowledgements between IndigoVision's Control Center and the Paxton system where Paxton alarms can be cleared from within the Control Center interface.
Manually Control Actions within the Third Party System	Relay actions in Control Center can trigger specific events in the Paxton system such as changing the access state of a door from locked to unlocked, silencing controllers etc.
Integration Server Specification	<p>PC requirements for Paxton Net2 vary. Refer to Paxton Net2 documentation for advice on machine specifications.</p> <p>There are no extra requirements on the specification of the PC due to the IndigoVision software.</p> <p>The Integration Module should not be run on the same server as the Windows NVR-AS 13.2 or earlier or certain Integration Modules.</p> <p>NOTE: The IndigoVision Paxton Integration is a licensed product. A correctly licensed USB dongle or software license key should be present on the platform running the Integration.</p>
Supported Products	Net2 Classic Controller, Net2 Nano Controller, Net2 Plus Controller, Net2 PaxLock
Supported Operating Systems	Windows® 7 (64-bit), Windows® 8.1 (64-bit), Windows® 10 (64-bit) version 1607 or later, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2

## Paxton Events and IndigoVision Actions Supported

Examples of Supported Events
Door opened with exit button
Door opened with network instruction
Control unit reset
Door forced open
Door left open
Tamper
Mains fail
Card not valid/card reported as lost
ACU not responding
Operator events

Examples of Supported Actions
PTZ Camera moves to Preset
Video from one or more cameras displayed on operator's PC
Notification email sent
Recording of camera started
CCTV site map pops up with event source highlighted
Two way audio connection established so operator can listen and talk to the source of the event
Relay triggered action initiated e.g. door opens or lights turn on